


GL Series: Single & Multi Output Switchers



200 Watt model



40, 65, 100 Watt models



These compact, low profile, AC/DC switching power supplies offer universal input voltage with no switches or jumpers, ideal for higher volume worldwide applications. 40 watt through 110 watt are printed circuit board design with pin and socket connections, 200 watt models are enclosed with internal DC brushless fan and screw terminal connections.

Features

- Universal input.
- Compact size.
- Industry standard size (3 x 5", 40 Watt).
- On board input fuse.
- Automatic overload protection.
- OVP on Output #1.
- UL Recognized, CSA Certified, CE, LVD.
- 100% Burn-In.
- One year warranty.
- Power fail signal on 110 and 200 Watt model.
- 200 Watt enclosed with screw terminals.

Mating Connector Kits

- Can be ordered separately for units with Molex connection (40, 65 and 110 Watt only).
- Used for input and output connection (applies to 40, 65, 110 units).
- Kits include mating housing and pins for input and output connection.

- GL40-KIT
- GL65-KIT
- GL110-KIT

Specifications

Parameter	Condition	Limit
Input		
Input Voltage		85 to 264 VAC
Frequency		47 to 63 Hz
Protection		Line Fuse on board
Inrush Current	Cold Start	15 to 60 A Max
Output		
Line Regulation	Full Rated Load	±0.5%
Load Regulation	Full Rated Load	±1% Single Output ±2% Main Output
Cross Regulation	Full Rated Load	5% Typical
Minimum Loading	Main Output	10%
Temp. Coefficient		±0.04%/°C
Hold up Time		10 mS min.
Overvoltage Protection	#1 Output	112 to 132% of Nominal
Output Ripple		2% peak to peak max.
General		
Operating Temperature	Full Rated Load	0 to 50°C
Storage Temperature		-20 to +85°C
Efficiency	Full Rated Load	65% min.
MTBF	Per MIL-HDBK-217E	100,000 hour
Shock & Vibration		Designed to meet MIL-STD 810C
EMI		FCC20780 Level B & VDE 0871 Level A
Safety	All Models	UL 1950, CSA C22.2 No. 234, EN 60950
Cooling	Full Load	Convection Cooling 200 W units have an internal fan

Applications

- Industrial computers
- Control
- Instrumentation
- Scanners
- Drive circuits
- CNC machinery
- Printers
- Peripherals


Selection Table for 40 Watt, GL Series

Catalog Number	Output 1	Output 2	Output 3	Maximum Output
GLS-01-040	5 V, 6A	-	-	30 W
GLS-02-040	12 V, 3.5 A	-	-	40 W
GLS-03-040	15 V, 3A	-	-	40 W
GLS-04-040	24 V, 2 A	-	-	40 W
GLD-01-040	5 V, 3 A	12 V, 2 A	-	40 W
GLD-02-040	5 V, 3 A	15 V, 2 A	-	40 W
GLD-03-040	5 V, 3 A	24 V, 1 A	-	40 W
GLT-01-040	5 V, 3 A	12 V, 2 A	-5 V, 0.3 A	40 W
GLT-02-040	5 V, 3 A	12 V, 2 A	-12 V, 0.3 A	40 W
GLT-03-040	5 V, 3 A	15 V, 2 A	-15 V, 0.3 A	40 W
GLT-04-040	5 V, 3 A	15 V, 2 A	-12 V, 0.3 A	40 W
GLT-05-040	5 V, 3 A	24 V, 1 A	-12 V, 0.3 A	40 W

Output Connector

Model	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6
GLS	Output 1	Output 1	Output 1	Return	Return	Return
GLD	Output 2	Output 1	Output 1	Common	Common	N/A
GLT	Output 2	Output 1	Output 1	Common	Common	Output 3

Dimensions (inches/mm) for 40 Watt, GL Series

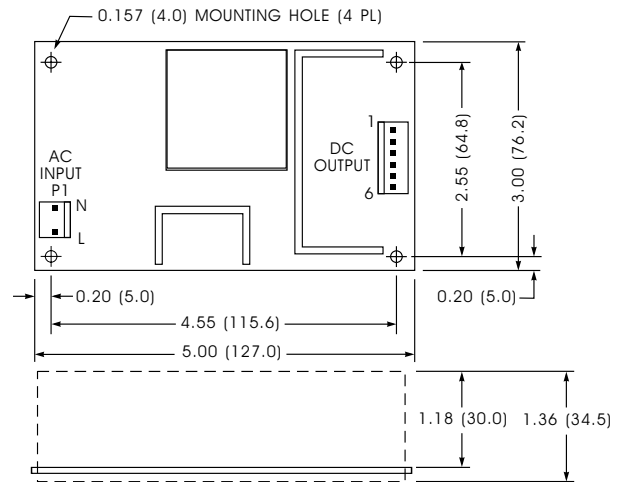

Notes:

1. Tolerance 0.02/0.5 maximum.
2. Input connector mates with Molex housing 09-50-3031 and Molex 63811-2200 series crimp terminal.
3. Output connector mates with Molex housing 09-50-3061 and Molex 63811-2200 series crimp terminal.
4. Weight: 10.6 oz. (300 grams) approx.
5. Input/Output Mating Connector kit available. Catalog number GL40-KIT.


Selection Table for 65 Watt, GL Series

Catalog Number	Output 1	Output 2	Output 3	Output 4	Maximum Output
GLS-01-065	5 V, 10 A	-	-	-	50 W
GLS-02-065	12 V, 5.5 A	-	-	-	65 W
GLS-03-065	15 V, 4.5 A	-	-	-	65 W
GLS-04-065	24 V, 3 A	-	-	-	65 W
GLD-01-065	5 V, 6 A	12 V, 3 A	-	-	65 W
GLD-02-065	5 V, 6 A	15 V, 3 A	-	-	65 W
GLD-03-065	5 V, 6 A	24 V, 2 A	-	-	65 W
GLT-01-065	5 V, 6 A	12 V, 3 A	-5 V, 0.5 A	-	65 W
GLT-02-065	5 V, 6 A	12 V, 3 A	-12 V, 0.5 A	-	65 W
GLT-03-065	5 V, 6 A	15 V, 3 A	-15 V, 0.5 A	-	65 W
GLT-04-065	5 V, 6 A	15 V, 3 A	-12 V, 0.5 A	-	65 W
GLT-05-065	5 V, 6 A	24 V, 2 A	-12 V, 0.5 A	-	65 W
GLQ-01-065	5 V, 6 A	12 V, 3 A	-12 V, 0.5 A	-5 V, 0.5 A	65 W

Output Connector

Model	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
GLS	Output 1	Output 1	Output 1	Output 1	Return	Return	Return	Return
GLD	Output 1	Output 1	Common	Common	Output 2	Output 2	N/A	N/A
GLT	Output 1	Output 1	Common	Common	Output 2	Output 2	Output 3	N/A
GLQ	Output 1	Output 1	Common	Common	Output 2	Output 2	Output 3	Output 4

Dimensions (inches/mm) for 65 Watt, GL Series

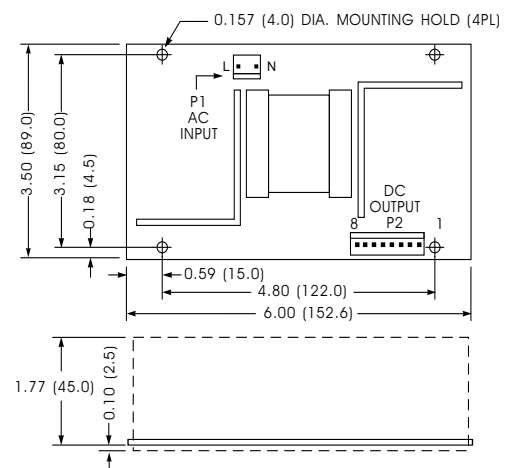

Notes:

1. Tolerance 0.02/0.5 maximum.
2. Input connector mates with Molex housing 09-50-3031 and Molex 63811-2200 series crimp terminal.
3. Output connector mates with Molex housing 09-50-3081 and Molex 63811-2200 series crimp terminal.
4. Weight: 13.4 oz. (380 grams) approx.
5. Input/Output Mating Connector kit available. Catalog number GL65-KIT.

GL Series: Single & Multi Output Switchers – continued

Selection Table for 110 Watt, GL Series


Catalog Number	Output 1	Output 2	Output 3	Output 4	Maximum Output*
GLS-01-110	5 V, 22 A	-	-	-	110 W
GLS-02-110	12 V, 9 A	-	-	-	110 W
GLS-03-110	15 V, 7.5 A	-	-	-	110 W
GLS-04-110	24 V, 4.5 A	-	-	-	110 W
GLD-01-110	5 V, 10 A	12 V, 5 A	-	-	110 W
GLT-01-110	5 V, 10 A	12 V, 3 A	-12 V, 1 A	-	110 W
GLT-02-110	5 V, 10 A	15 V, 4 A	-15 V, 1 A	-	110 W
GLQ-01-110	5 V, 10 A	12 V, 5 A	-12 V, 1 A	-5 V, 1 A	110 W
GLQ-02-110	5 V, 10 A	12 V, 5 A	-12 V, 1 A	+12 V, 1 A	110 W
GLQ-03-110	5 V, 10 A	12 V, 5 A	-12 V, 1 A	+24 V, 1 A	110 W
GLQ-04-110	5 V, 10 A	15 V, 4 A	-15 V, 1 A	-5 V, 1 A	110 W

* With 25 CFM airflow, 80 W with convection cooling.

Output Connector

Model	Pin 1-2-3	Pin 4-5	Pin 6-7	Pin 8-9	Pin 10	Pin 11	Pin 12	Pin 13
GLS	Output 1	Return	Return	Output 1	Power Fail	N/A	Key	N/A
GLD	Output 1	Common	Common	Output 2	Power Fail	N/A	Key	N/A
GLT	Output 1	Common	Common	Output 2	Power Fail	Output 3	Key	N/A
GLQ	Output 1	Common	Common	Output 2	Power Fail	Output 3	Key	Output 4

Dimensions (inches/mm) for 110 Watt, GL Series

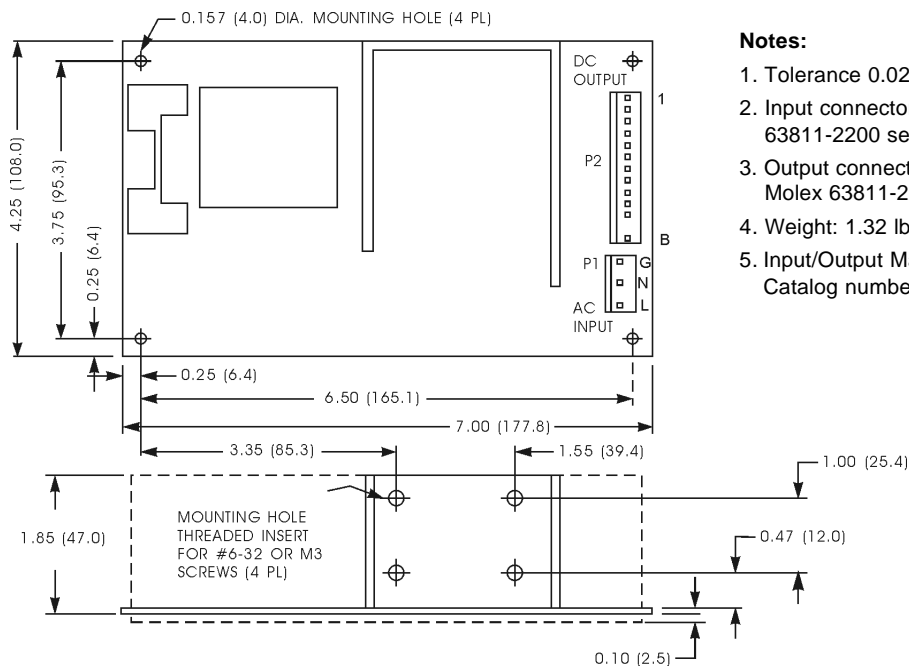

Notes:

1. Tolerance 0.02 (0.5) maximum.
2. Input connector mates with Molex housing 09-50-3051 and Molex 63811-2200 series crimp terminal.
3. Output connector mates with Molex housing 09-50-3131 and Molex 63811-2200 series crimp terminal.
4. Weight: 1.32 lbs. (600 grams) approx.
5. Input/Output Mating Connector kit available. Catalog number GL110-KIT.

GL Series: Single & Multi Output Switchers – continued

Selection Table for 200 Watt, GL Series

Catalog Number	Output 1	Output 2	Output 3	Output 4	Maximum Output
GLS-01-200	5 V, 40 A	-	-	-	200 W
GLS-02-200	12 V, 16.7 A	-	-	-	200 W
GLS-03-200	15 V, 13.4 A	-	-	-	200 W
GLS-04-200	24 V, 8.4 A	-	-	-	200 W
GLD-01-200	5 V, 30 A	12 V, 8 A	-	-	200 W
GLD-02-200	5 V, 30 A	15 V, 6 A	-	-	200 W
GLD-03-200	5 V, 30 A	24 V, 4 A	-	-	200 W
GLT-01-200	5 V, 30 A	12 V, 8 A	-5 V, 6 A	-	200 W
GLT-02-200	5 V, 30 A	12 V, 8 A	-12 V, 4 A	-	200 W
GLT-03-200	5 V, 30 A	15 V, 6 A	-15 V, 4 A	-	200 W
GLT-04-200	5 V, 30 A	15 V, 6 A	-12 V, 4 A	-	200 W
GLQ-01-200	5 V, 30 A	12 V, 8 A	-12 V, 4 A	5 V, 6 A	200 W
GLQ-02-200	5 V, 30 A	15 V, 6 A	-15 V, 4 A	24 V, 4 A	200 W
GLQ-03-200	5 V, 30 A	12 V, 8 A	-12 V, 4 A	12 V, 4 A	200 W
GLQ-04-200	5 V, 30 A	12 V, 8 A	-15 V, 4 A	15 V, 4 A	200 W
GLQ-05-200	5 V, 30 A	12 V, 8 A	-12 V, 4 A	24 V, 4 A	200 W

Output Connector (Terminal Block)

Model	Pin 1-2	Pin 3-4-5	Pin 6	Pin 7	Pin 8	Pin 9
GLS	- Sense	Return	Output 1	Output 1	Output 1	+Sense
GLD	Output 1	Common	Output 2	N/A	N/A	N/A
GLT	Output 1	Common	Output 2	Output 3	N/A	N/A
GLQ	Output 1	Common	Output 2	Output 3	Output 4 Return	Output 4


Auxiliary Signal Connector

Model	Pin 1	Pin 2	Pin 3	Pin 4
All Models	Power Fail	Common	Common	Fan

Auxiliary Mating Connector Kit

GL200-KIT. Kit is for auxiliary signal connection only. Not required for input and output connection which are screw terminal.

Dimensions (inches/mm) for 200 Watt, GL Series

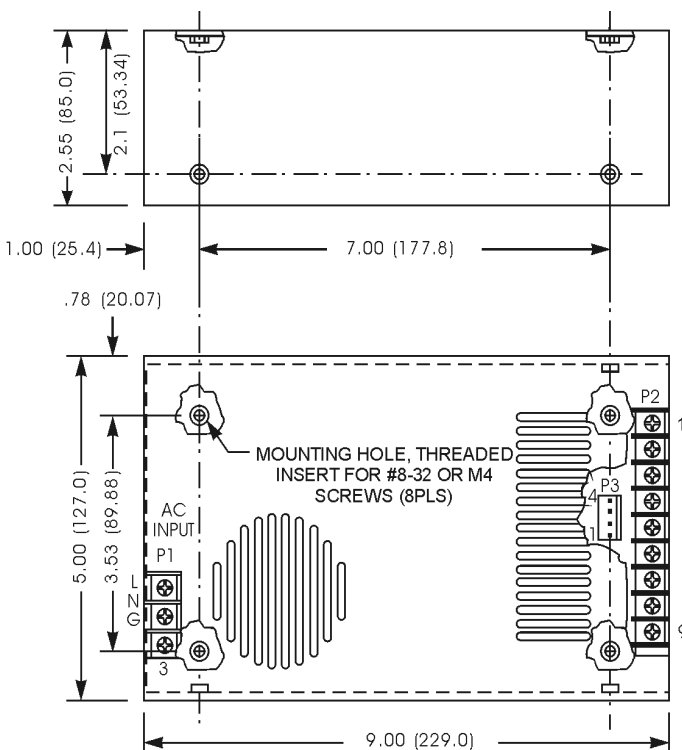

Notes:

1. Tolerance 0.02 (0.5) maximum.
2. Input connector P1 and output connector P2 equipped with #6-32 screws on 0.375 inch centers.
3. Connectors P3 mates with Molex housing 22-01-1043 and Molex 4809 series crimp terminal.
4. Weight: 3.9 lbs. (1,750 grams) approx.